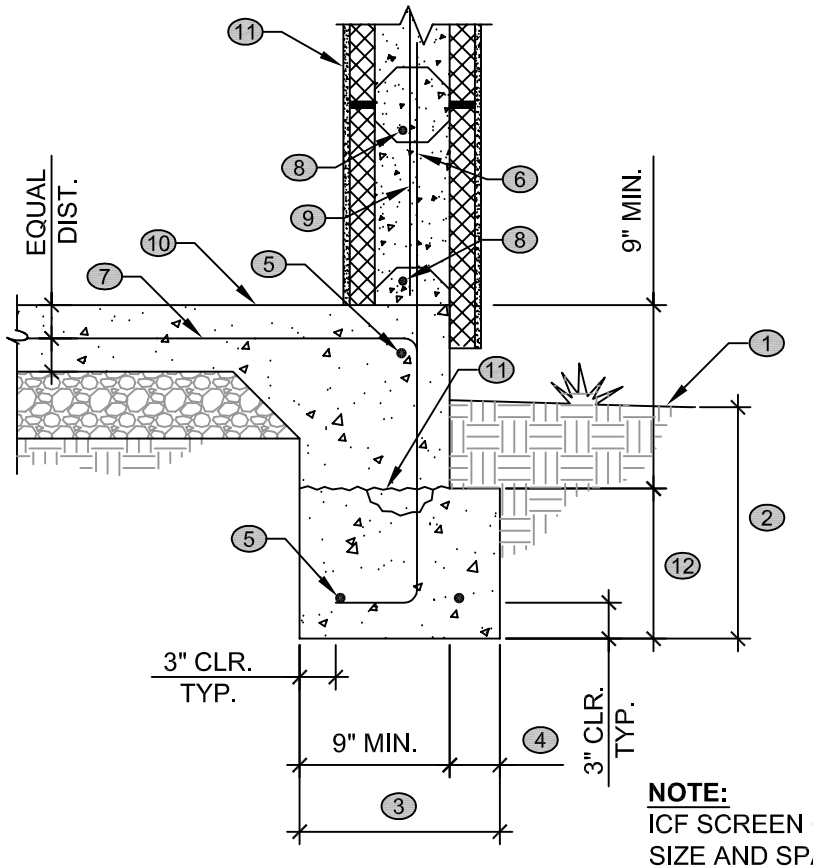

1. FINISHED GRADE
2. 18" MINIMUM BELOW FINISH GRADE
3. FOOTING SIZE PER DESIGN
4. OFFSET WIDEN FOOTING 4"
5. REINFORCING PER DESIGN
6. VERTICAL DOWELS TO MATCH ICF WALL VERTICAL REINFORCING ALTERNATE BENDS
7. #4 VERTICAL DOWELS AT 48" O.C. CENTER DOWELS IN SLAB THICKNESS AND PROVIDE 32" EMBEDMENT INTO SLAB
8. ICF TYPICAL HORIZONTAL REINFORCING
9. ICF TYPICAL VERTICAL REINFORCING
10. 4" THICK CONCRETE SLAB OVER 4" ABC FILL
11. OPTIONAL POUR JOINT
12. 9" MINIMUM FIRST POUR THICKNESS

A. LAP REINFORCING BARS PER 40 DIAMETERS

NOTE:
ICF SCREEN GRID TO BE PER IRC 2012 FOOTING WIDTH, REBAR SIZE AND SPACING PER SECTION R611 - 2012

11 ICF WALL AT CONTINUOUS FOOTING

SCALE: 1'-0" = 3/4"